




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04Q 7/30, H04B 7/26		A3	(11) International Publication Number: WO 97/21316
			(43) International Publication Date: 12 June 1997 (12.06.97)
(21) International Application Number: PCT/EP96/04967		(81) Designated States: AU, BR, CN, JP, MX, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 13 November 1996 (13.11.96)		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 9524908.2 5 December 1995 (05.12.95) GB		(88) Date of publication of the international search report: 17 July 1997 (17.07.97)	
(71) Applicant (for all designated States except US): MOTOROLA LIMITED [GB/GB]; Jays Close, Viabes Industrial Estate, Basingstoke, Hampshire RG22 4PD (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only): BENN, Howard [GB/GB]; 4 Horseshoe Crescent, Swindon, Wiltshire SN5 5AJ (GB).			
(74) Agents: IBBOTSON, Harry et al.; Motorola, European Intellectual Property Operations, Midpoint, Alencon Link, Basingstoke, Hampshire RG21 7PL (GB).			

(54) Title: COMMUNICATION SYSTEM WITH BASE STATION TRANSCEIVER AND RADIO COMMUNICATION UNITS

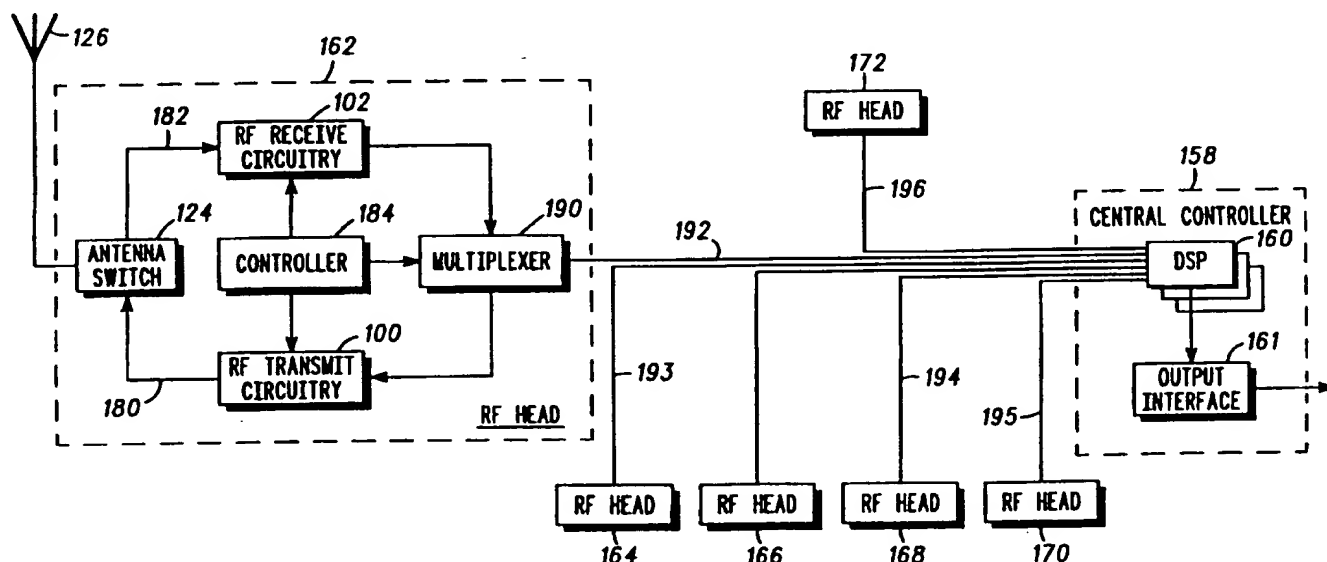

**(57) Abstract**

As exemplified, signal processing for multiple Radio Frequency (RF) heads (162-172) of a communication system (160) is located at a central control unit (158), such as a base station transceiver. More particularly, in the case where the RF head requires transmission and reception capabilities (in a TDM pico-cellular environment, for example), the central control unit is arranged to undertake power intensive channel coding and channel decoding for each of the RF heads, while the RF heads principally contain RF circuitry required for communication. As such, power consumption and heat generation arising from signal processing is restricted to the central control unit (158), thereby allowing a reduction in the cost and physical size of the RF heads (162-172).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

-1-

## COMMUNICATION SYSTEM WITH BASE STATION TRANSCEIVER AND RADIO COMMUNICATION UNITS

### Background of the Invention

5

This invention relates, in general, to a communication system and is particularly, but not exclusively, applicable to a cellular communication system (such as a pico-cellular communication system) having a base station transceiver and multiple radio communication units responsive thereto.

10

### Summary of the Prior Art

In communication systems, such as the time division multiplexed (TDM) pan-European Global System for Mobile (GSM) cellular communication system and other frequency re-use systems, there is a seemingly relentless drive towards both a reduction in power consumption and a miniaturisation of infrastructure equipment.

In infrastructure equipment particularly, advances in system technology and architecture have led to increased signal processing and the necessity for arrays of dedicated Digital Signal Processors (DSPs) that consume considerable amounts of power. Consequently, housings for the infrastructure equipment have needed to be sufficiently large to facilitate cooling processes, as will be understood. Furthermore, power consumption is a major issue with respect to remotely-located, battery-powered devices, since any drain of current from the battery reduces its operational life-span.

In an attempt to reduce size, repeater stations have been developed to co-operate with (and extend the coverage provided by) Radio Channel Units (RCUs). These repeater stations contain an antenna-duplexer-amplifier chain that is coupled (via an expensive, low-loss shielded cable) to a nominal first or last amplifier stage of a transceiver of a RCU. More particularly, when considering a transmit path in a repeater station, a signal that would otherwise be directly transmitted from the RCU is instead broadcast from the antenna of the repeater station after first having been amplified to an appropriate level to compensate for any loss experienced in the shielded cable. In this way, the use of repeater stations has segregated a portion of the

-2-

analog circuitry from a conventional RCU. However, this solution does not address the problems relating to power consumption and heat generation arising from, predominantly, the signal processing requirements of the RCU.

## 5 Summary of the Invention

According to a first aspect of the present invention there is provided a communication system having a central control unit and at least one remote radio frequency unit interacting with the central control unit, wherein the  
10 central control unit comprises at least one processing unit responsible for processing at least one of a channel coding function and a channel decoding function for the at least one remote radio unit.

In preferred embodiment the central control unit is coupled to a plurality of  
15 remote radio frequency units and the at least one processing unit is responsible for processing the at least one of a channel coding function and a channel decoding function for the plurality remote radio frequency units. Also, each processing unit of the at least one processing unit is arranged to perform multiple channel coding and multiple channel decoding.

20 In a second aspect of the present invention there is provided a central control unit having at least one processing unit arranged to process at least one of a channel coding function and a channel decoding function of a remote radio frequency unit interacting with the central control unit.

25 In another aspect of the present invention there is provided a remote radio frequency transceiver unit for reception and transmission of information signals, comprising means for partially processing the information signals for both reception and transmission and means for selectively interacting with a  
30 central control unit to allow channel coding and channel decoding of the information signals to occur at the central control unit.

An exemplary embodiment of the present invention will now be described with reference to the accompanying drawings.

35

## Brief Description of the Drawings

-3-

FIG. 1 shows a prior art cellular communication system.

FIG. 2 shows a sectored site typically utilised in the prior art cellular communication system of FIG. 1.

5

FIG. 3 is a depiction of a prior art Radio Channel Unit (RCU), and its interface with a prior art Base Station (BS).

10 FIG. 4 illustrates division of a cellular communication system in accordance with a preferred embodiment of the present invention.

#### Detailed Description of a Preferred Embodiment

15 FIG. 1 shows a typical prior art cellular communications system 10 in which a coverage area is defined by a number of sites (or cells) 12-22 represented by conventional hexagonal fashion. Each site 12-22 has a base station 24-34 responsible for controlling the flow of uni-directional or bi-directional communication traffic in the respective site. Typically, the base stations 24-34 will be centrally located, although other positions may be desirable subject to surrounding terrain or propagation conditions (affected by walls 20 off/in buildings, valleys and areas of forestation, or the like). As will be understood, each base station 24-34 may receive 38 and/or transmit 40 signals from/to communication devices 42-46 located in its coverage area. Typically, each base station (BS) 24-34 is further responsive to an operations and maintenance centre (OMC) 49 arranged to have overall system control, 25 which OMC 49 may be either on a regional or system basis (dependent upon the size of the communications system 10). With respect to the communication devices 42-46, these may have the capacity for duplex, simplex or one-way communication, and may have either a roaming 30 capability (allowing movement between sites) or be fixedly located. For example, communication units 42, 44 and 46 may be digital or analog cellular radiotelephones having voice or data capabilities. Indeed, cellular radio telephone 42 may provide access to a portable computer via a Personal Computer (PC) card interface or the like. Furthermore, communication unit 35 43 may be a radio pager, whereas communication unit 45 may be located in a Supervisory Control and Data Acquisition (SCADA) device responsible for the monitoring of a flow rate or control of a valve 47 in a pipeline 48.

Taking a cellular telephony system by way of example, each site 12-22 of the cellular communication system 10 of FIG. 1 is typically partitioned into a plurality of operational sectors 50-60 (as shown in FIG. 2), with each sector  
5 50-60 serviced by a radio channel unit (RCU) 62-72 and associated transmit and/or receive antennas 74-84, respectively. Usually, the operational sectors are each defined by an area serviced (covered) by a single Broadcast Control Channel (BCCH).

10 Referring to FIG. 3, a prior art Radio Channel Unit (RCU) 90 and its interface 92 with a prior art Base Station 94 is depicted. For the sake of brevity, the prior art RCU 90 shows only some of its major functional blocks, and is described in the context of a transceiver arrangement having a discrete transmitter chain 96 and a discrete receiver chain 98. With respect to the  
15 transmitter chain 96 and the receiver chain 98, each contains differing amounts of RF circuitry (identified as blocks 100 and 102, respectively).

The transmitter chain 96 of the RCU 90 comprises a channel coder 104 that is responsive to an intermediate frequency (IF) signal 106 emanating from the  
20 base station 94 (which in this case is a base station transceiver). A channel coded output signal 108 is provided to a modulator 110 which is arranged to generate a modulated output signal 112. A first mixer 114, responsive to both a first frequency signal 116 (generated by a first oscillator 118) and the modulated output signal 112, produces a signal output 120 that is  
25 subsequently amplified in amplifier 122 before being routed, via antenna switch (duplexer) 124, to an antenna 124 for transmission. In the transmitter chain 96, the RF transmit circuitry 100 is represented by modulator 110, first mixer 114, first oscillator 118 and amplifier 122.

30 In the receiver chain 98, a received signal is routed through the antenna switch 124 to an amplifier 128 for amplification. After amplification, a amplified received signal 130 provides a first input to a second mixer 132. A second input signal 133 (provided by a second oscillator 134) is then combined in the second mixer 132 with the amplified received signal 130. As will be  
35 appreciated, frequency  $f_2$  will typically be different to frequency  $f_1$ . Then, after combination in the second mixer 132, an output signal 136 is digitised in an analog-to-digital (A/D) converter 138, with a resultant digital output signal

-5-

140 provided to a channel decoder 142 via a channel equaliser 146. An output from the channel decoder 142 represents an intermediate frequency (IF) input signal 146 that is provided to the base station 94. In the receiver chain 96, the RF receive circuitry 102 is represented by amplifier 128, second mixer 132, 5 second oscillator 134, A/D converter 138 and equaliser 144.

As will be understood, use of either one of the transmitter chain 96 or the receiver chain 98 in isolation is sufficient to realise either a transmitter or a receiver; neither of which strictly require the use of the antenna switch 124.

10

Referring to the figure, it can be seen that the interface 92 between the RCU 90 and the base station 94 is realised by a partition after the channel coder 104 and the channel decoder 142, i.e. at a baseband data rate of the intermediate frequency signals 106 and 146 (typically, 270k symbols per second (sps) for GSM). Furthermore, as will be appreciated, the data rate 15 between the equaliser 144 and the channel decoder (in the receive chain 98) will be either 270k sps at 1 bit for hard-decision data or 270k sps at 4 bits for soft-decision data, whereas the data rate between the channel coder 104 and the modulator 110 will be 270k sps at 1 bit. Additionally, the data rate 20 between the A/D converter 138 and the equaliser 144 for the GSM cellular communication system is represented by a 4 times over-sampling of 8 bits at 270k symbols per second.

In accordance with a preferred embodiment of the present invention, FIG. 4 25 illustrates a division of functional responsibilities between a central control unit 158 and at least one remote radio unit ("RF head") of a communication system 159. The central control unit contains at least one processing unit 160 (such as a DSP) that is arranged to accommodate all channel coding and channel decoding for the at least one remote RF head of the communication 30 system 160. The DSP 160 (or the bank of DSPs, if required) is coupled to an output interface 161 of the central control unit 158 to allow access to necessary system information or system communication. In fact, in the preferred embodiment, multiple channel coding and multiple channel decoding is performed on a single DSP.

35

In this specific instance of FIG. 4, the communication system 160 has been shown with six identical RF heads 162-172, only one (RF head 162) of which

-6-

has been shown in exploded detail. Basically, each RF head 162-172 comprises a transmitter chain 180, a receiver chain 182 and an antenna switch 124 for selectively coupling the transmitter chain 180 and the receiver chain 182 to the antenna 126. The transmitter chain 180 and the receiver chain 182 respectively contain RF transmit circuitry 100 and RF receive circuitry 102 (including the channel equaliser), as previously described in relation to FIG. 3. Furthermore, each RF head contains a controller 184, such as a microprocessor, for operational control of the RF transmit circuitry 100 and the RF receive circuitry 102. Additionally, a multiplexer 190, also operationally response to the controller 184, selectively provides a gateway over a communication resource 192 (and communication resources 193-196 for RF heads 164-172, respectively) to allow information flow between each RF head the central control unit 158.

In the preferred embodiment, the communication resource 192 is a twisted-pair, High Density Subscriber Line (HDSL) that allows duplex multiplexing at 768k symbols per second. The communication resource also allows multiplexing of control channel information, the requirement for which will be understood.

As such, the communication system of the preferred embodiment of the present invention is partitioned at a point in a conventional BTS where the data rate in the receive path is ~270k sps and the data rate in the transmit rate is ~270k sps, whereby the central control unit 158 is arranged to undertake signal processing intensive (and hence power intensive) channel coding and channel decoding for each of the RF heads, while the RF heads contain, principally, only RF circuitry required for communication. At this point, demodulated data is at the baseband rate with one or more bits per symbol.

To maintain synchronisation between the various RF heads 162-172 and the central control unit 158, the preferred embodiment of the present invention utilises the time-correction facility provided by the HDSL communication resource. This time-correction facility allows for the correction of propagation delays that arise because of the varying lengths of the HDSL between the RF heads 162-172 and the central control unit 158. More particularly, the preferred embodiment of the present invention contemplates the periodic

-7-

transmission of a synchronisation word in an identified time-slot of the HDSL link. For example, time-slot zero (of the twelve available on the HDSL) may be utilised on an hourly basis. As will be appreciated, some form of synchronisation is required because equalised data associated with a time-slot of a TDM frame (for example) must be decoded with reference to a time-slot number. Therefore, partitioning of the communication system 159 in accordance with the preferred embodiment of the preferred embodiment has the effect of cloaking the time-slot number from the channel equaliser. Furthermore, with particular regard to GSM, there is a need to have the ability to synchronise transmissions between sites.

As will be appreciated, the present invention is particularly suited for adoption in a pico-cellular environment (such as within floors of buildings in which sites (or cells) have communication coverage areas of a few hundred metres or less) because each radio channel unit (RF head) is less complex, smaller and relatively inexpensive to manufacture in comparison with conventional RCUs having channel coding and decoding circuitry. Indeed, the present invention provides a low power radio unit with a single-line interface.

It will, of course, be understood that the above description has been given by way of example only and that modifications in detail, such as the number of RF heads serviced by a single central control unit, may be made within the scope of the present invention. Indeed, although the RF heads of FIG. 4 have been described in relation to a transceiver, the present invention is clearly applicable to separate receivers or transmitters, with the skilled addressee appreciating the mere need for the elimination of either a receiver chain or a transmitter chain from the illustrated RF head configuration. Furthermore, other forms of communication resource (192-196) may be substituted, e.g. coaxial cables, fibre-optic links, E1 links (i.e. European or (CEPT) 32 x 64k bps leased lines) or radio links. In all cases, the communication resources 192-196 allow interleaving of coded baseband data from the central control unit 158 to the RF heads (162-172).

**Claims**

1. A communication system having a central control unit and at least one remote radio frequency unit interacting with the central control unit, wherein  
5 the central control unit comprises at least one processing unit responsible for processing at least one of a channel coding function and a channel decoding function for the at least one remote radio unit.
2. The communication system as claimed in claim 1, wherein the central  
10 control unit is coupled to a plurality of remote radio frequency units and the at least one processing unit is responsible for processing the at least one of a channel coding function and a channel decoding function for the plurality remote radio frequency units.
- 15 3. The communication system as claimed in claim 1 or 2, wherein each processing unit of the at least one processing unit is arranged to perform multiple channel coding and multiple channel decoding.
- 20 4. The communication system as claimed in claim 1, 2 or 3, further comprising a High Density Subscriber Line, coupled between the at least one remote radio frequency unit to the central control unit, arranged to allow the interacting.
- 25 5. The communication system of any preceding claim, wherein the communication system is a pico-cellular communication system.
6. The communication system of any preceding claim, wherein the at least one remote radio frequency unit is a transceiver
- 30 7. The communication system of any preceding claim, wherein the at least one radio frequency unit is a receiver
8. The communication system of any preceding claim, wherein the at least one radio frequency unit is a transmitter
- 35 9. A central control unit having at least one processing unit arranged to process at least one of a channel coding function and a channel decoding


-9-

function of a remote radio frequency unit interacting with the central control unit.


10. A remote radio frequency transceiver unit for reception and  
5 transmission of information signals, comprising means for partially  
processing the information signals for both reception and transmission and  
means for selectively interacting with a central control unit to allow channel  
coding and channel decoding of the information signals to occur at the central  
control unit.

10


1 / 4

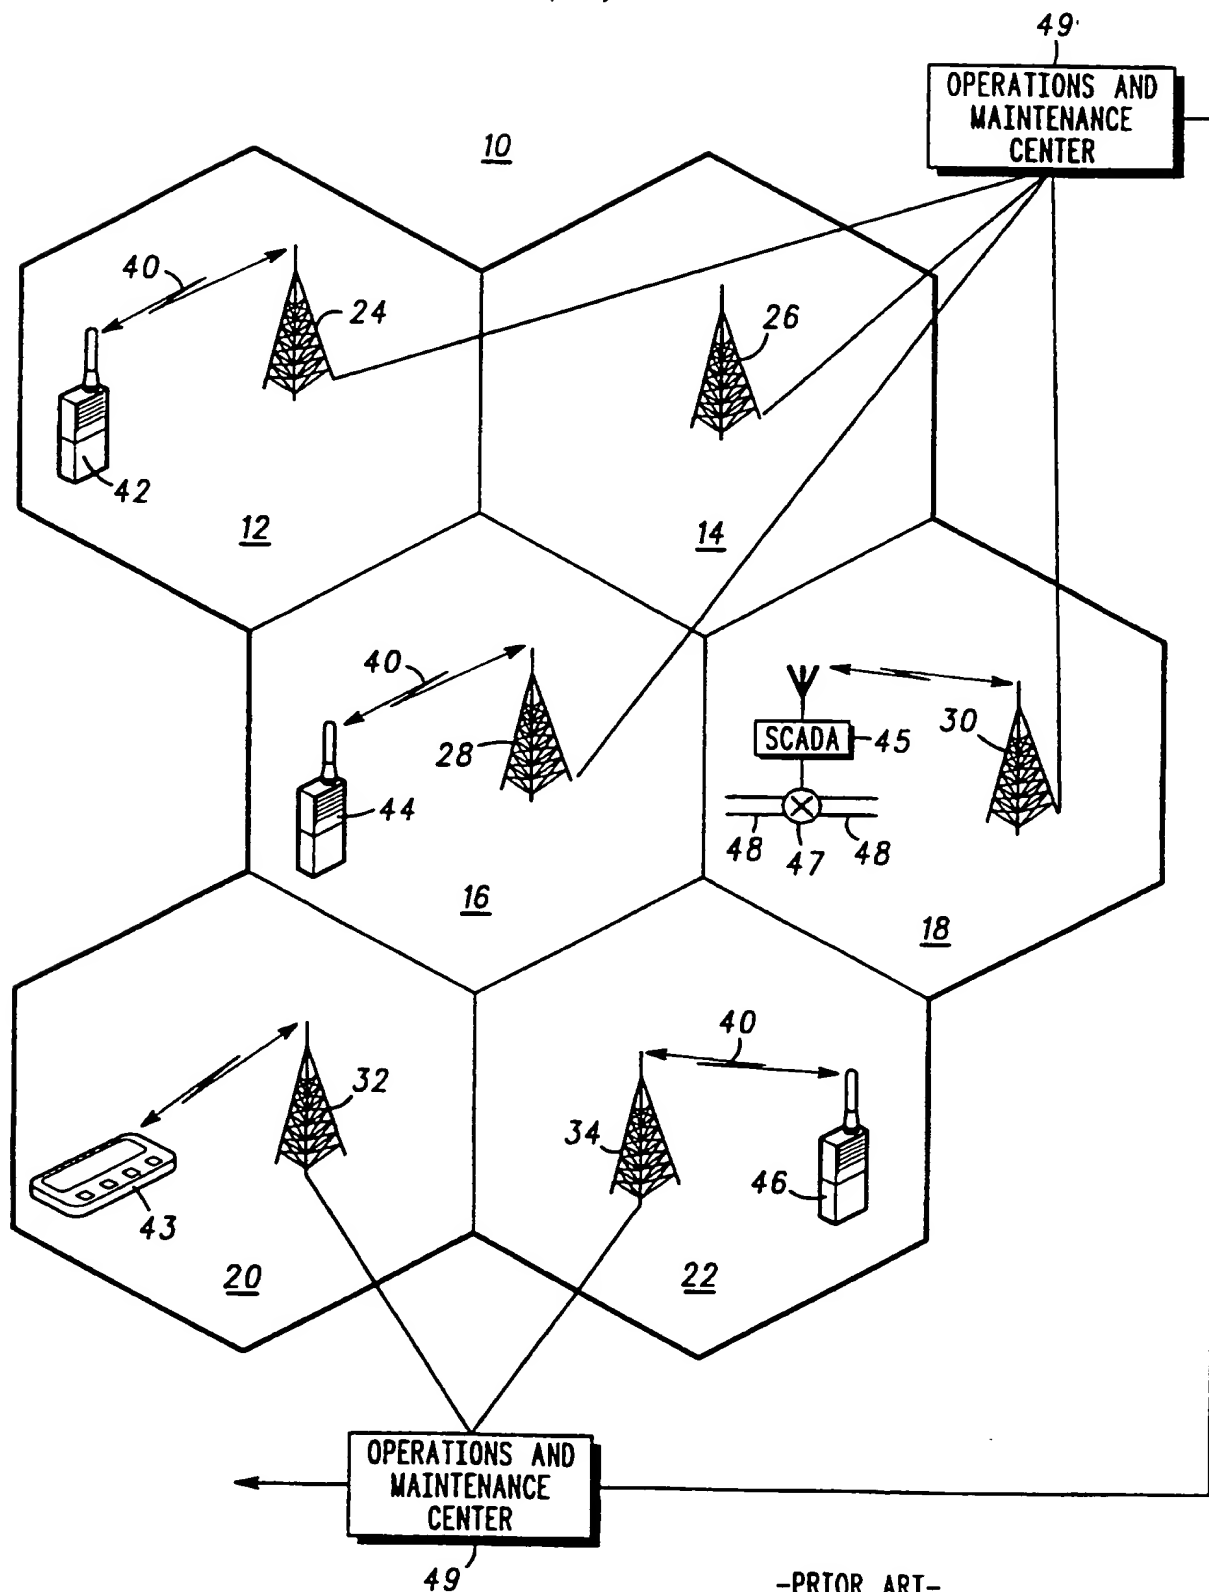**FIG. 1**

2 / 4

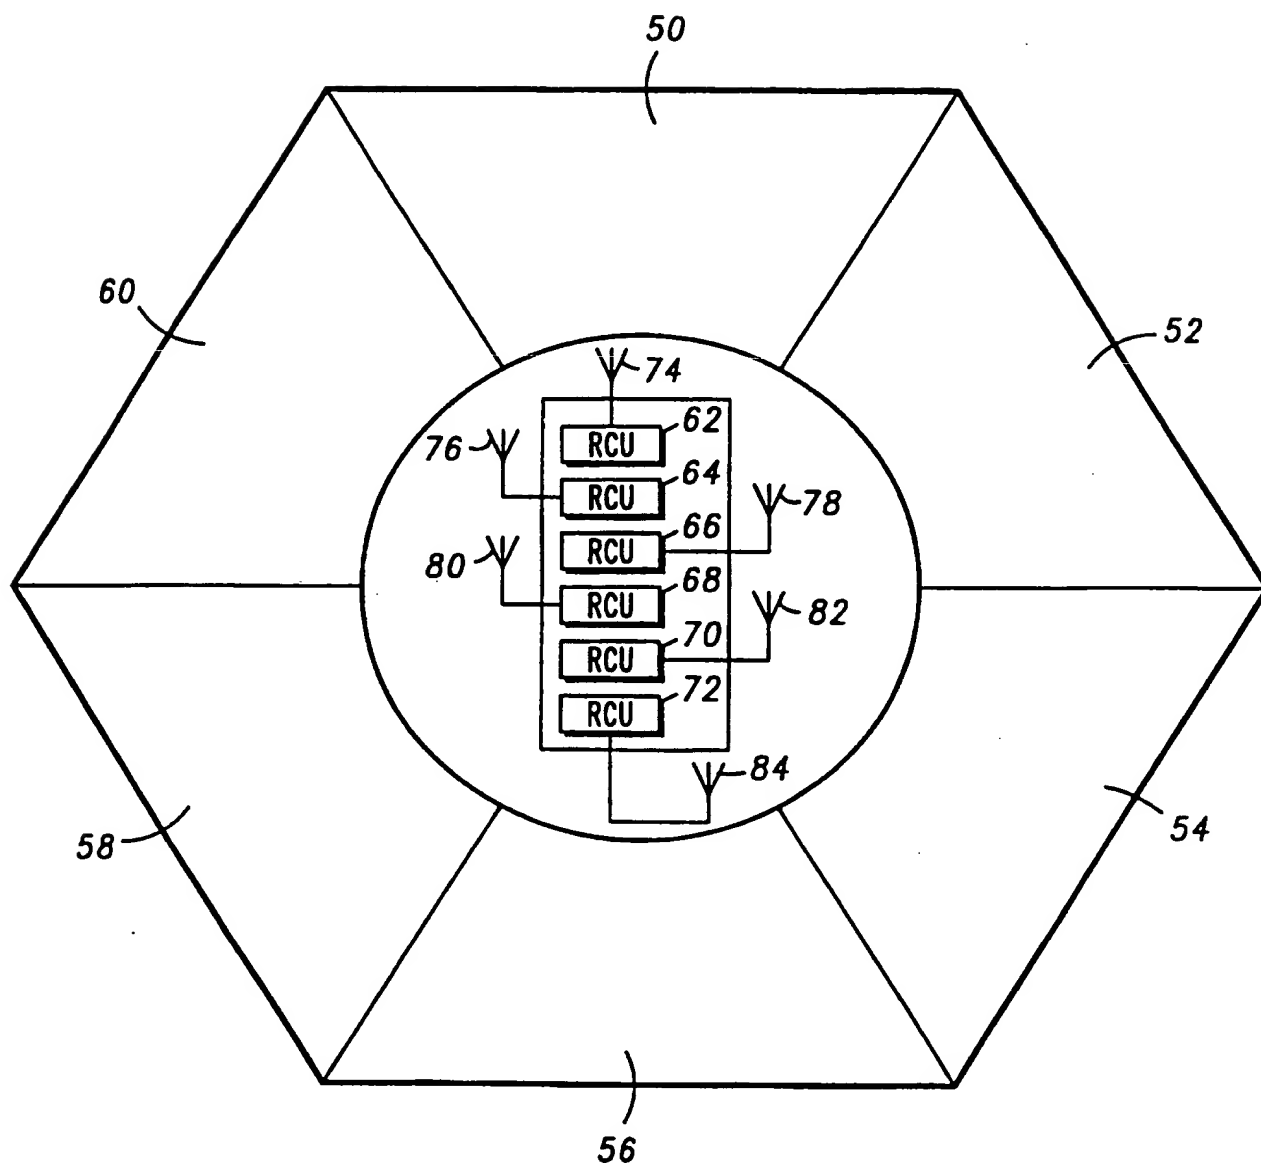**FIG. 2**

3 / 4

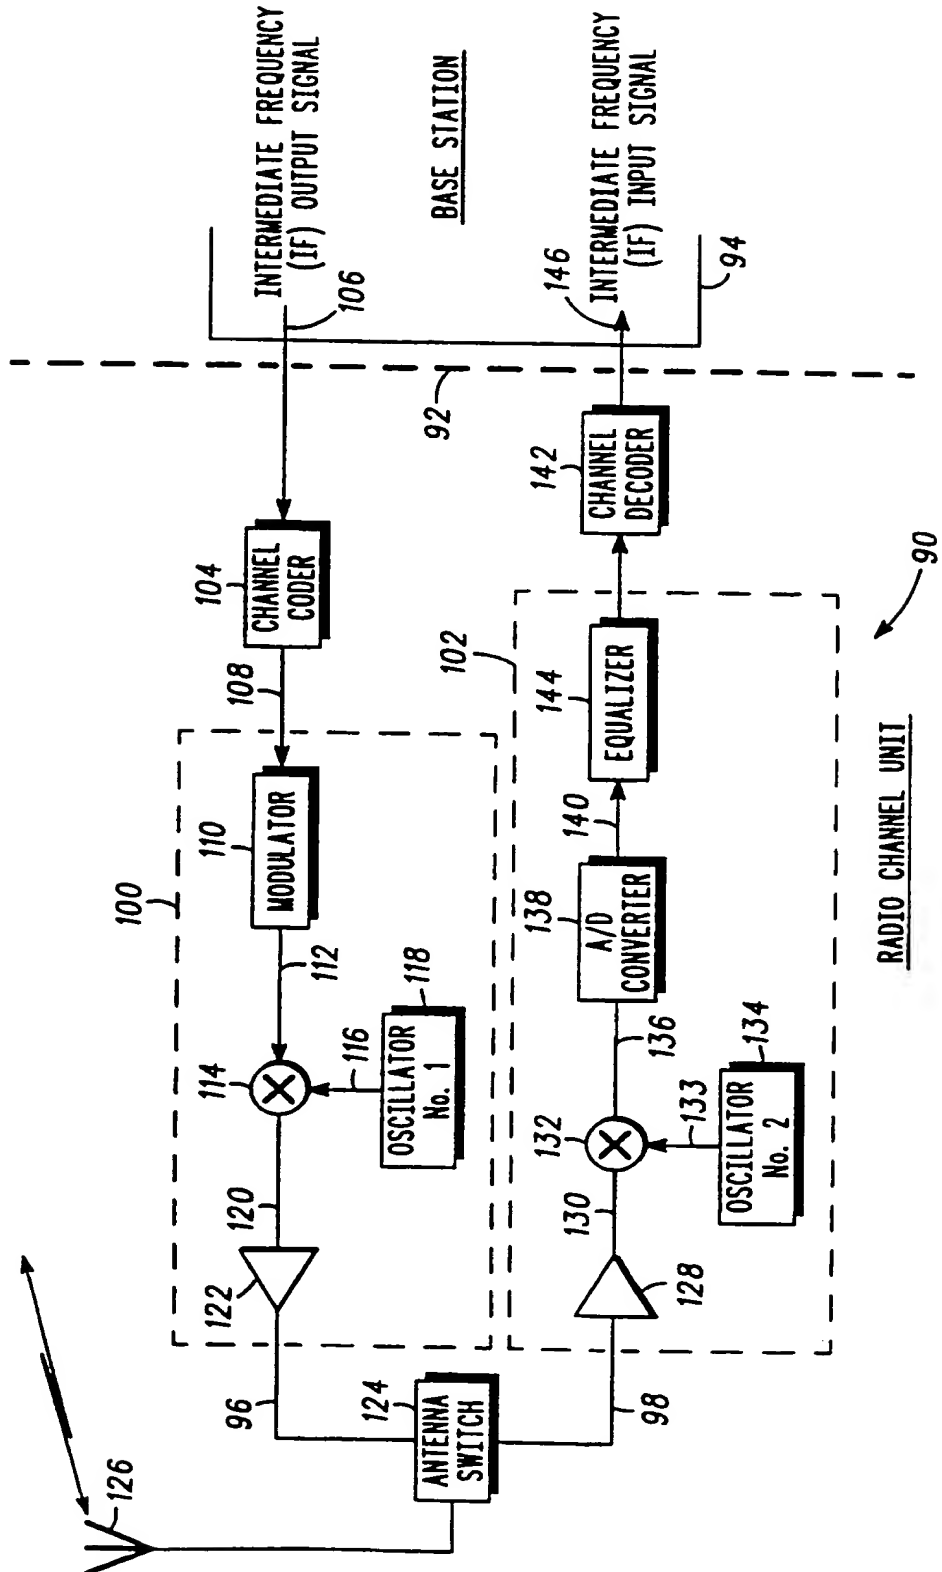

-PRIOR ART-

FIG. 3

4 / 4

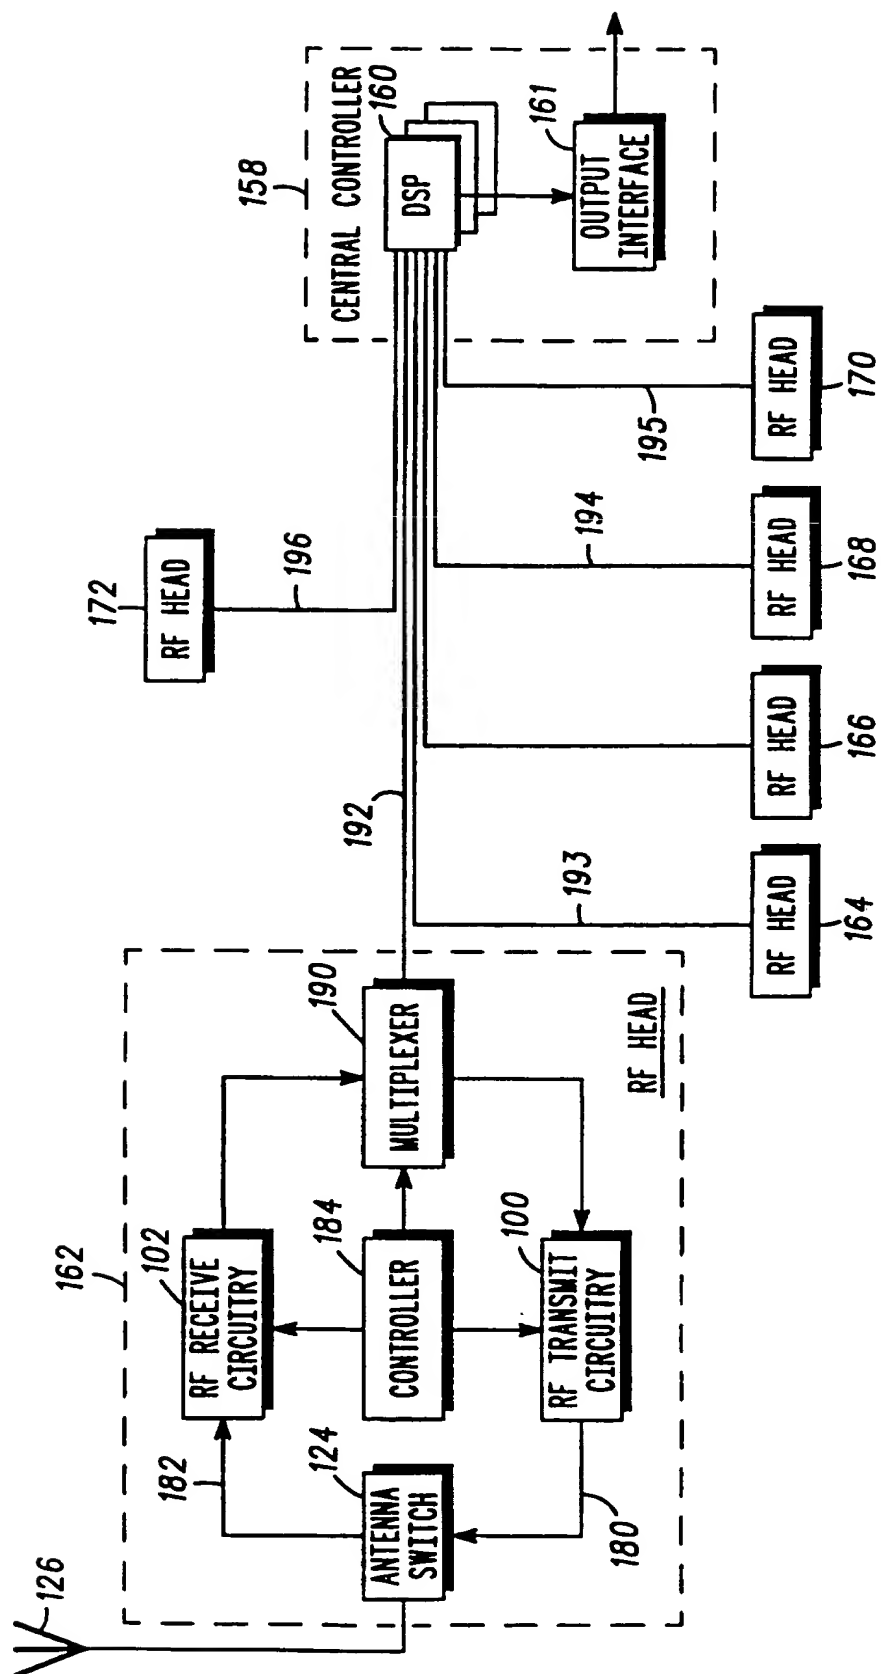


FIG. 4

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 96/04967

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/30 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 566 874 A (SIEMENS AG) 27 October 1993 see the whole document ---	1-10
X	WO 95 05720 A (NOKIA TELECOMMUNICATIONS OY ;HURME HARRI (FI); HEIKKILAE JUHA (FI)) 23 February 1995 see page 10, line 25 - page 11, line 15 ---	1-10
X	EP 0 590 412 A (SIEMENS AG) 6 April 1994 see the whole document ---	1-10
X	EP 0 497 083 A (ERICSSON TELEFON AB L M) 5 August 1992 see the whole document ---	1-10
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

14 May 1997

Date of mailing of the international search report

- 3. 06. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Janysek, J-M

# INTERNATIONAL SEARCH REPORT

Int. .onal Application No

PCT/EP 96/04967

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 95 23463 A (ERICSSON TELEFON AB L M) 31  August 1995  see page 10, line 13 - page 13, line 23  see page 16, line 18 - page 18, line 25;  figures 2,3  -----</p>	1-10

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 96/04967

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0566874 A	27-10-93	NONE	
WO 9505720 A	23-02-95	FI 933574 A AU 7461794 A EP 0741950 A	13-02-95 14-03-95 13-11-96
EP 0590412 A	06-04-94	DE 4232480 A DE 4238410 A FI 934235 A NO 933457 A	31-03-94 19-05-94 29-03-94 29-03-94
EP 0497083 A	05-08-92	SE 467856 B AU 671558 B AU 7443194 A AU 655220 B AU 9159691 A CA 2078222 A CN 1063980 A,B CN 1110458 A EP 0656734 A SE 9100309 A WO 9214344 A SE 467855 B SE 9103095 A US 5436900 A	21-09-92 29-08-96 08-12-94 08-12-94 07-09-92 01-08-92 26-08-92 18-10-95 07-06-95 01-08-92 20-08-92 21-09-92 01-08-92 25-07-95
WO 9523463 A	31-08-95	AU 1865995 A CN 1123589 A EP 0696395 A FI 955068 A JP 9501034 T US 5555260 A	11-09-95 29-05-96 14-02-96 24-10-95 28-01-97 10-09-96